


WWW.RESUNSOLAR.COM

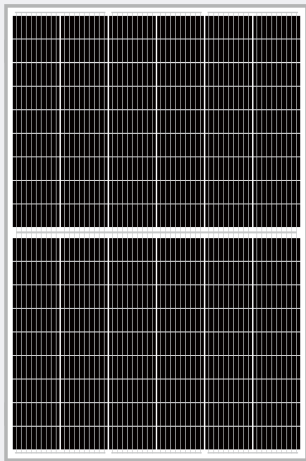


108 Cells
Mono-crystalline 9-11BB

400-415W
Power output

21.25%
The Highest Efficiency

0~ +5W
Tolerance

0.5% Annual Degradation
over 30 years

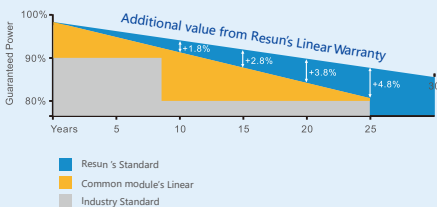

LINEAR PERFORMANCE WARRANTY
12 year Product Warranty / 30 year Linear Power Warranty

RS8V-M

RS8V-M HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716




RS8V-M




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

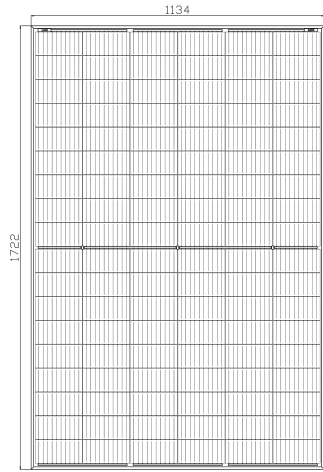


Front View

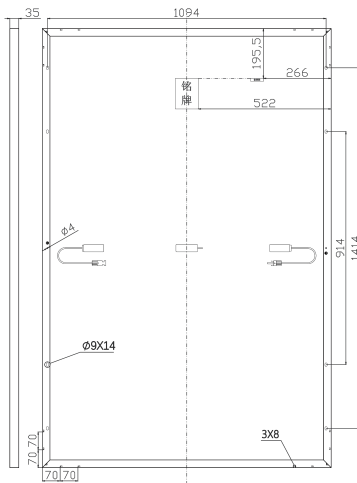


Back View

I-V CURVES OF PV MODULE(400W)



P-V CURVES OF PV MODULE(400W)



ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	400W	405W	410W	415W
Open Circuit Voltage-Voc(V)	37.07	37.23	37.32	37.45
Short Circuit Current-Isc(A)	13.79	13.87	13.95	14.02
Maximum Power Voltage-Vmp(V)	31.01	31.21	31.45	31.61
Maximum Power Current-Imp(A)	12.90	12.98	13.04	13.13
Module Efficiency (%)	20.48%	20.74%	21.00%	21.25%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax (Wp)	302W	306W	310W	314W
Open Circuit Voltage-Voc (V)	34.88	35.12	35.23	35.37
Short Circuit Current-Isc (A)	11.03	11.10	11.16	11.22
Maximum Power Voltage-Vmp(V)	29.26	29.47	29.72	29.89
Maximum Power Current-Imp(A)	10.32	10.38	10.43	10.50

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline 182*91mm,9/10/11 Bus bars
Cell configuration	108cells(6*18)
Module dimensions	1722*1134*35mm
Weight	22kg
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP68,3 diodes
Cable	4mm ² (IEC)/12AWG(UL),350mm(+)/450mm(-) or customized
Connectors	MC4 or MC4 Comparable

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	- 0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	- 0.35%/°C
Operational Temperature	- 40~ +85°C
Maximum System Voltage	1500V(IEC)/1500V
Max Series Fuse Rating	25A
Limiting Reverse Current	25A

PACKING DETAILS

Loading Capacity	806pcs/40HQ
Packing Manner	31pcs/pallet
Package Number	26pallets

A: Room 606, No.13, Yongshang Garden, Jingfeng Road, Mudu Town, Wuzhong District, Suzhou, Jiangsu Province, China

F: +86512-66292101 T: +86512-66293858
W: www.resunsolar.com E: info@resunsolar.com