


WWW.RESUNSOLAR.COM

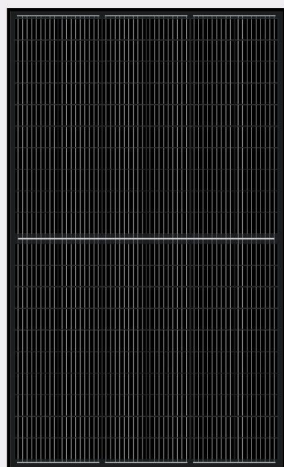

120 CELLS

Mono Half-Cell 9BB

325-340 W

Power output


20.15%

The Highest Efficiency

0~+3%

Tolerance

**0.5% Annual Degradation
over 30 years**

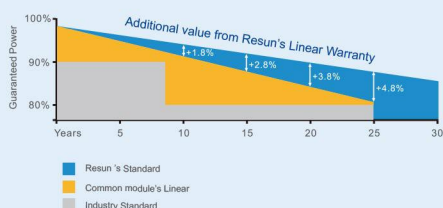

LINEAR PERFORMANCE WARRANTY
12 year Product Warranty / 30 year Linear Power Warranty

RS6K-M FULL BLACK

RS6K-M HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect. The full black design makes the module appearance outstanding and ideal for building installations.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Aesthetic Design

The full black module is aesthetically designed with outstanding and premium visual appearance.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO9001 TUV PID-FREE CE IEC 61215/61730/61701/62716




RS6K-M FULL BLACK




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

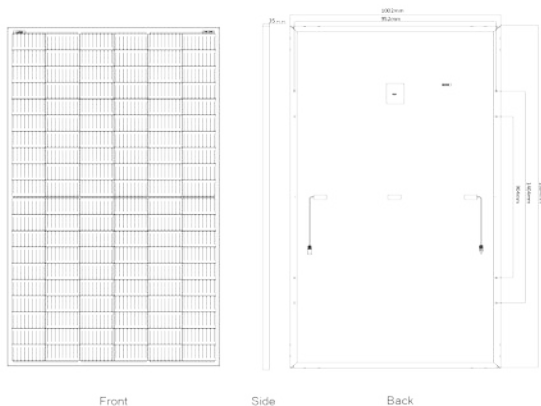


Front Side Back


Current-Voltage Curve (RS6K-330M)

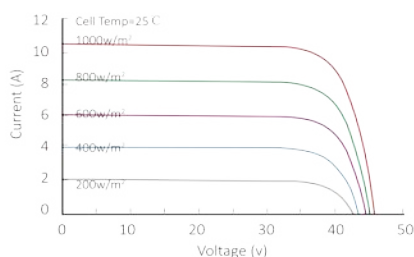

Power-Voltage Curve (RS6K-330M)

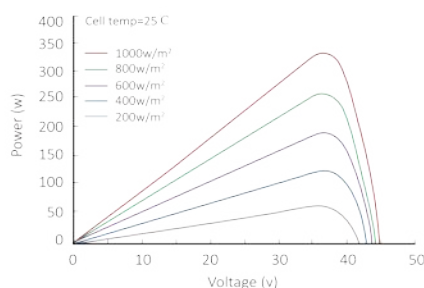

Partner information

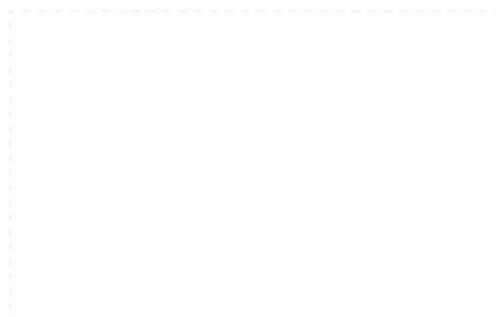

A: Room 606, No. 13, Yongshang Garden, Jingfeng Road, Mudu Town, Wuzhong District, Suzhou, Jiangsu Province, China
F: +86512-66292101 T: +86 512-66293858
W: www.resunsolar.com E: info@resunsolar.com

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	325W	330W	335W	340W
Open Circuit Voltage-Voc(V)	41.1V	41.3V	41.5V	41.7V
Short Circuit Current-Isc(A)	10.20A	10.31A	10.36A	10.55A
Maximum Power Voltage-Vmp(V)	33.6V	33.8V	34.0V	34.2V
Maximum Power Current-Imp(A)	9.66A	9.77A	9.87A	9.96A
Module Efficiency (%)	19.26%	19.56%	19.85%	20.15%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax (Wp)	242W	246W	250W	253W
Open Circuit Voltage-Voc (V)	38.0V	38.2V	38.4V	38.6V
Short Circuit Current-Isc (A)	8.54A	8.65A	8.74A	8.86A
Maximum Power Voltage-Vmp(V)	31.6V	31.8V	32.0V	32.2V
Maximum Power Current-Imp(A)	7.66A	7.74A	7.82A	7.86A

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Half-Cell Mono 158.75mmx79.375mm, 9 Bus bars
Cell configuration	120 Cells (6x20)
Module dimensions	1684x1002x35mm
Weight	19KGS
Front Cover	3.2mm Tempered Glass
Frame Material	Black Anodized Aluminum Alloy
J-BOX	IP67 or IP68, 3 Diodes
Cable	4mm ² (IEC)/12AWG(UL), 300mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	30pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.34%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/600V(UL)
Max Series Fuse Rating	20A

PACKAGING CONFIGURATION

	40HQ
Modules per container	896pcs
Package	30pcs/pallet, 2pcs/carton
Package Number	28pallets + 28cartons