


WWW.RESUNSOLAR.COM

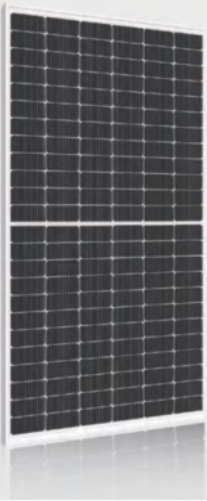

## RS8I 575M-F30

RS8I-M HALF-CELL series is produced with high efficiency multi-busbar cells, which reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by crack and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.

**144 Cells**

Mono crystalline

**575W**

Power Output


**22.3%**

The Highest Efficiency

**0-5 W**

Tolerance

**0.5% Annual Degradation  
over 30 years**

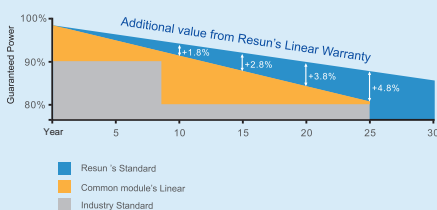

**15 Year Product Warranty**

**30 Year Linear Power Warranty**



High module conversion efficiency (up to 22.3%), through superior manufacturing technology



Guaranteed 0~+5W positive power output tolerance ensures high reliability



Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



Excellent performance under low light environments (mornings, evenings and cloudy days)



Suitable for harsh environments, such as coasts, deserts and lakes. Withstand high level of wind loads (2400pa) and snow loads (5400pa)

### Full range of products and certification systems

ISO 9001/14001 TUV PID-FREE CE IEC 61215/61730/61701/62716




# RS8I 575M-F30



GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER

Dimension of PV Modules Unit: mm

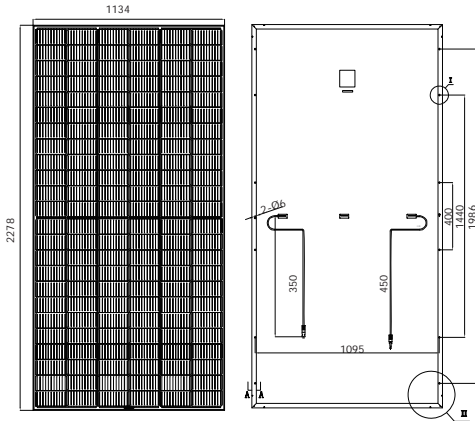

## Electrical Data(STC)

Rated Power In Watts-Pmax(Wp)	575W
Open Circuit Voltage-Voc(V)	50.50
Short Circuit Current-Isc(A)	14.28
Maximum Power Voltage-Vmp(V)	42.57
Maximum Power Current-Imp(A)	13.51
Module Efficiency(%)	22.3%

STC: irradiance 1000W/m<sup>2</sup>, component temperature 25°C, Air Mass AM1.5 according to EN 60904-3

## Electrical Data(NOCT)

Rated Power In Watts-Pmax(Wp)	436
Open Circuit Voltage-Voc(V)	47.33
Short Circuit Current-Isc(A)	11.36
Maximum Power Voltage-Vmp(V)	40.30
Maximum Power Current-Imp(A)	10.82

NMOT: irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, Air Mass AM1.5, wind speed 1m/s

## Mechanical Data



Solar Cells	Mono-crystalline 182*91mm,10 Bus bars
Cell Configuration	144cells(6*24)
Module Dimensions	2278*1134*30mm
Weight	27.2kg
Front Cover	3.2mm Tempered Glass
J-Box	IP68
Cable	4mm <sup>2</sup> (IEC)/12AWG(UL),300mm/400mm
Connectors	MC4 or MC4 Compatible

## Temperature & Maximum ratings

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	- 0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	- 0.39%/°C
Operational Temperature	- 40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	25A
Limiting Reverse Current	25A

## Packaging Configuration

	40HQ
Number of modules per container	720pcs
Package	36 pcs/pallet
Package Weight	20 pallets
Package Number	1000kg/pallets
Package Dimension	

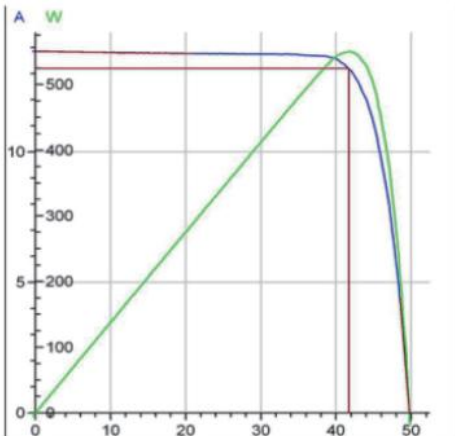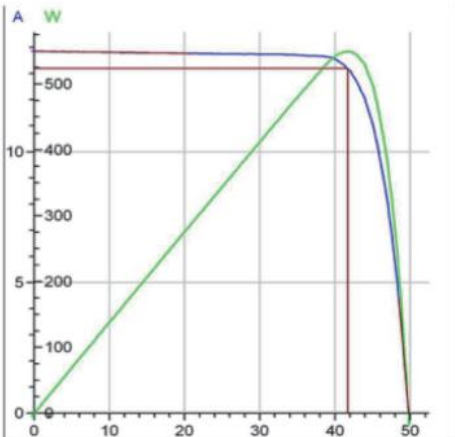

A: No.99, Zhidong Road, Zhixi Town, Jintan District, Changzhou City, Jiangsu Province, China

T:+86 512-66292101

W:www.resunsolar.com E:info@resunsolar.com