


**BIFACIAL MODULE**

WWW.RESUNSOLAR.COM

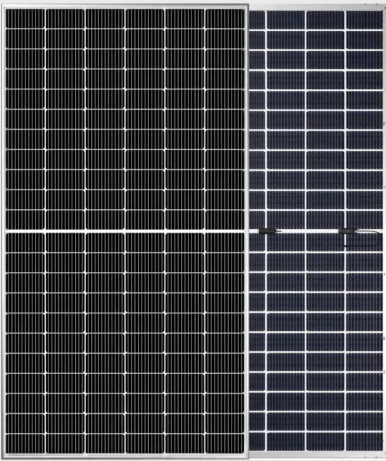

**132 Cells**

N-type Topcon Mono 16BB

**510-535W**

Power output


**22.53%**

The Highest Efficiency

**0~+5W**

Tolerance

**0.5% Annual Degradation over 30 years**

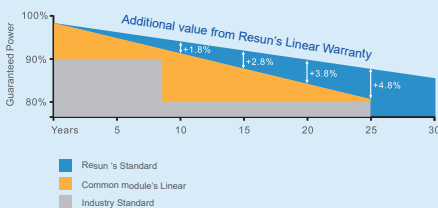

## RS8H-M-BD

**RS8H-M-BD HALF-CELL** series is produced with N-type Topcon high efficiency MBB cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



### High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



### Anti-PID Resistance

Prominent anti PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



### Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



### High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



### Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



### High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

## Full range of products and certification systems

ISO9001 TUV PID-FREE CEIEC61215/61730/61701/62716



**LINEAR PERFORMANCE WARRANTY**


15 year Product Warranty / 30 year Linear Power Warranty

# RS8H-M-BD




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER


Dimension of PV Modules Unit: mm

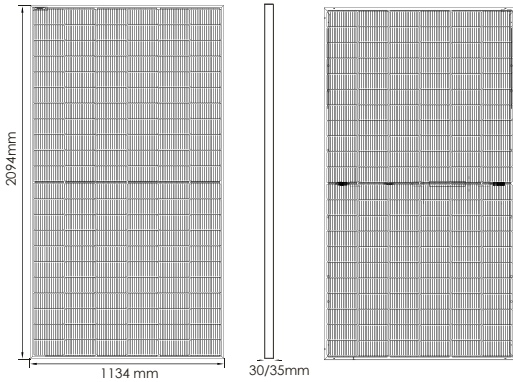

I-V CURVES OF PV MODULE(520 W)

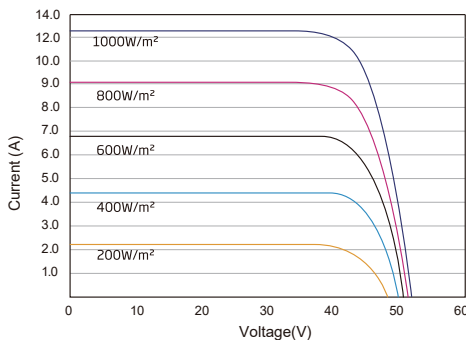

P-V CURVES OF PV MODULE(520W)

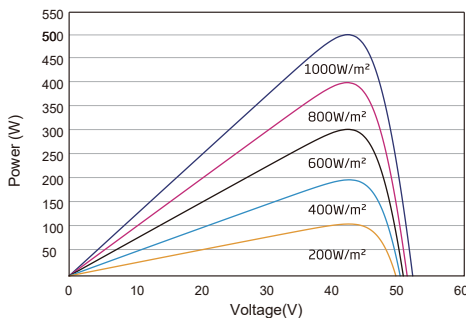

**Address:** No.30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China  
**Web:** www.resunsolar.com  
**E-mail:** info@resunsolar.com  
**Tel:** +86 512-66292101 / +86 512-66293858

## ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	510	515	520	525	530	535
Open Circuit Voltage-Voc(V)	45.85	45.98	46.11	46.24	46.37	46.50
Short Circuit Current-Isc(A)	14.07	14.14	14.21	14.28	14.35	14.42
Maximum Power Voltage-Vmp(V)	38.71	38.89	39.07	39.24	39.41	39.58
Maximum Power Current-Imp(A)	13.17	13.24	13.31	13.38	13.45	13.52
Module Efficiency(%)	21.48%	21.69%	21.90%	22.11%	22.32%	22.53%

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

## ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	386	390	396	400	404	408
Open Circuit Voltage-Voc (V)	42.99	43.13	43.26	43.39	43.53	43.65
Short Circuit Current-Isc(A)	11.41	11.48	11.55	11.62	11.69	11.76
Maximum Power Voltage-Vmp(V)	36.11	36.20	36.37	36.54	36.71	36.88
Maximum Power Current-Imp(A)	10.68	10.77	10.89	10.95	11.01	11.07

NOCT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

## BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum Power(pmax)	536	541	546	551	557	562
	Module Efficiency STC(%)	22.6%	22.8%	23.0%	23.2%	23.4%	23.7%
15%	Maximum Power(pmax)	587	592	598	604	610	615
	Module Efficiency STC(%)	24.7%	24.9%	25.2%	25.4%	25.7%	25.9%
25%	Maximum Power(pmax)	638	644	650	656	663	669
	Module Efficiency STC(%)	26.8%	27.1%	27.4%	27.6%	27.9%	28.2%

## MECHANICAL DATA

Solar Cells	Mono-crystalline 182*91mm, 16 Bus bars
Cell Configuration	132cells(6*22)
Module Dimensions	2094*1134*30mm/35mm
Weight	25.0/26.3kg
Front Cover	3.2mm Tempered Glass
J-Box	IP68
Cable	4mm <sup>2</sup> (IEC)/12AWG(UL), 350mm+450mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	31pcs/pallet

## TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/C
Temperature Coefficient of Isc	0.045%/C
Temperature Coefficient of Pmax	-0.30%/C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

## PACKAGING CONFIGURATION

	40HQ
Number of modules per container	682pcs
Package	31pcs/pallet
Package Number	22pallets
Package Weight	846kg/pallet
Package Dimension	2125*1130*1270mm/pallet