


BIFACIAL MODULE WITH DOUBLE GLASS

WWW.RESUNSOLAR.COM

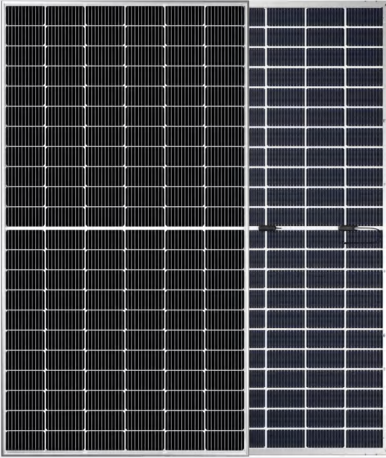

132 Cells

N-type Topcon Mono 16BB

510-535W

Power output


22.53%

The Highest Efficiency

0~+5W

Tolerance

0.5% Annual Degradation over 30 years

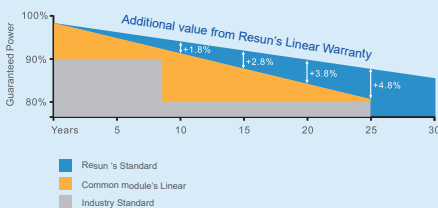

LINEAR PERFORMANCE WARRANTY

15 year Product Warranty / 30 year Linear Power Warranty

RS8H-M-DG

RS8H-M-DG HALF-CELL series is produced with N-type Topcon high efficiency MBB cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 2.0+2.0mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO9001 TUV PID-FREE CEIEC61215/61730/61701/62716




RS8H-M-DG




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER


Dimension of PV Modules Unit: mm

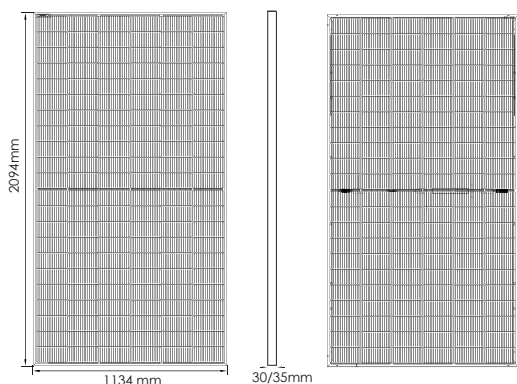

I-V CURVES OF PV MODULE(520 W)

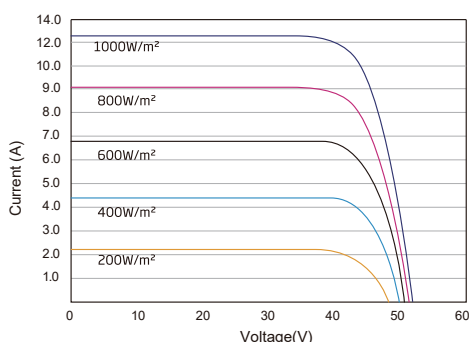

P-V CURVES OF PV MODULE(520W)

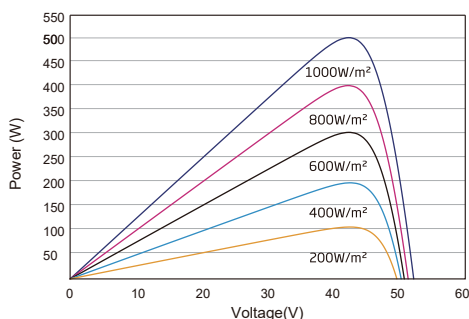

Address: No.30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China
Web: www.resunsolar.com
E-mail: info@resunsolar.com
Tel: +86 512-66292101 / +86 512-66293858

ELECTRICAL DATA(STC)

| | | | | | | |
|-------------------------------|--------|--------|--------|--------|--------|--------|
| Rated Power in Watts-Pmax(Wp) | 510 | 515 | 520 | 525 | 530 | 535 |
| Open Circuit Voltage-Voc(V) | 45.85 | 45.98 | 46.11 | 46.24 | 46.37 | 46.50 |
| Short Circuit Current-Isc(A) | 14.07 | 14.14 | 14.21 | 14.28 | 14.35 | 14.42 |
| Maximum Power Voltage-Vmp(V) | 38.71 | 38.89 | 39.07 | 39.24 | 39.41 | 39.58 |
| Maximum Power Current-Imp(A) | 13.17 | 13.24 | 13.31 | 13.38 | 13.45 | 13.52 |
| Module Efficiency(%) | 21.48% | 21.69% | 21.90% | 22.11% | 22.32% | 22.53% |

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

| | | | | | | |
|------------------------------|-------|-------|-------|-------|-------|-------|
| Maximum Power-Pmax(Wp) | 386 | 390 | 396 | 400 | 404 | 408 |
| Open Circuit Voltage-Voc (V) | 42.99 | 43.13 | 43.26 | 43.39 | 43.53 | 43.65 |
| Short Circuit Current-Isc(A) | 11.41 | 11.48 | 11.55 | 11.62 | 11.69 | 11.76 |
| Maximum Power Voltage-Vmp(V) | 36.11 | 36.20 | 36.37 | 36.54 | 36.71 | 36.88 |
| Maximum Power Current-Imp(A) | 10.68 | 10.77 | 10.89 | 10.95 | 11.01 | 11.07 |

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

| | | | | | | | |
|-----|--------------------------|-------|-------|-------|-------|-------|-------|
| 5% | Maximum Power(pmax) | 536 | 541 | 546 | 551 | 557 | 562 |
| | Module Efficiency STC(%) | 22.6% | 22.8% | 23.0% | 23.2% | 23.4% | 23.7% |
| 15% | Maximum Power(pmax) | 587 | 592 | 598 | 604 | 610 | 615 |
| | Module Efficiency STC(%) | 24.7% | 24.9% | 25.2% | 25.4% | 25.7% | 25.9% |
| 25% | Maximum Power(pmax) | 638 | 644 | 650 | 656 | 663 | 669 |
| | Module Efficiency STC(%) | 26.8% | 27.1% | 27.4% | 27.6% | 27.9% | 28.2% |

MECHANICAL DATA

| | |
|--------------------|---|
| Solar Cells | Mono-crystalline 182*91mm, 16 Bus bars |
| Cell Configuration | 132cells(6*22) |
| Module Dimensions | 2094*1134*30mm/35mm |
| Weight | 28.9kg/29.4kg |
| Front Cover | 2.0+2.0mm Tempered Glass |
| J-Box | IP68 |
| Cable | 4mm ² (IEC)/12AWG(UL), 350mm+450mm |
| Connectors | MC4 or MC4 Comparable |
| Standard Packaging | 36/31pcs/pallet |

TEMPERATURE & MAXIMUM RATINGS

| | |
|--|----------------------|
| Nominal Operating Cell Temperature(NOCT) | 45°C±2°C |
| Temperature Coefficient of Voc | -0.25%/C |
| Temperature Coefficient of Isc | 0.045%/C |
| Temperature Coefficient of Pmax | -0.30%/C |
| Operational Temperature | -40~+85°C |
| Maximum System Voltage | 1500V(IEC)/1500V(UL) |
| Max Series Fuse Rating | 30A |
| Limiting Reverse Current | 30A |

PACKAGING CONFIGURATION

| | |
|---------------------------------|-------------------------|
| | 40HQ |
| Number of modules per container | 792/682pcs |
| Package | 36/31pcs/pallet |
| Package Number | 22pallets |
| Package Weight | 1079/950kg/pallet |
| Package Dimension | 2125*1130*1270mm/pallet |