


BIFACIAL MODULE WITH DOUBLE GLASS

WWW.RESUNSOLAR.COM

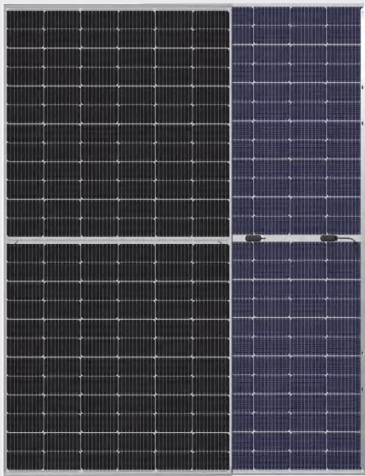

144 Cells

N-type Topcon Mono 16 Bus bars

565-590W

Power output


22.84%

The Highest Efficiency

0~+5W

Tolerance

0.5% Annual Degradation over 30 years

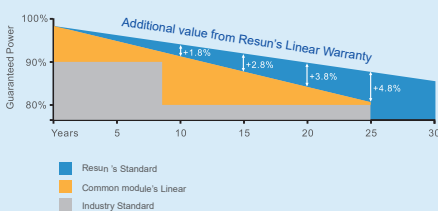

LINEAR PERFORMANCE WARRANTY

15 year Product Warranty / 30 year Linear Power Warranty

RS8I-M-DG

RS8I-M-DG HALF-CELL series is produced with N-type Topcon high efficiency MBB cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO9001 TUV PID-FREE CEIEC61215/61730/61701/62716




RS81-M-DG




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER


Dimension of PV Modules Unit: mm

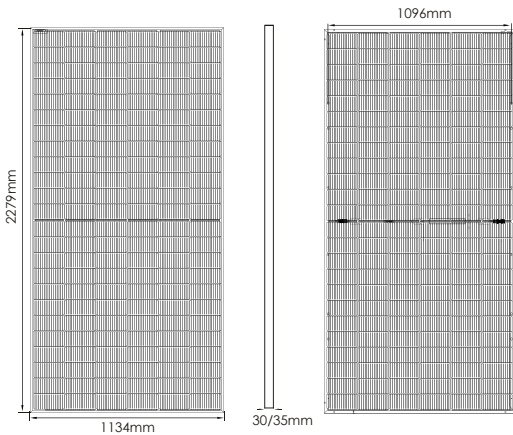

I-V CURVES OF PV MODULE (580W)

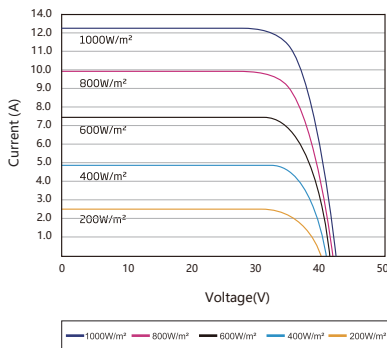

P-V CURVES OF PV MODULE (580W)

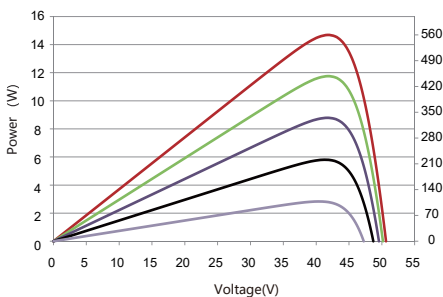

Address: Room 606, No.13, Yongshang Garden, Jingfeng Road, Mudu Town, Wuzhong District, Suzhou, Jiangsu Province, China

Web: www.resunsolar.com

E-mail: info@resunsolar.com

Tel: +86 512-66292101 / +86 512-66293858

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	565W	570W	575W	580W	585W	590W
Open Circuit Voltage-Voc(V)	50.20	50.35	50.50	50.65	50.80	50.95
Short Circuit Current-Isc(A)	14.14	14.21	14.28	14.35	14.42	14.49
Maximum Power Voltage-Vmp(V)	42.26	42.42	42.57	42.72	42.87	43.01
Maximum Power Current-Imp(A)	13.37	13.44	13.51	13.58	13.65	13.72
Module Efficiency(%)	21.87%	22.07%	22.26%	22.45%	22.65%	22.84%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	428W	432W	436W	440W	444W	448W
Open Circuit Voltage-Voc (V)	46.98	47.11	47.33	47.46	47.59	47.72
Short Circuit Current-Isc(A)	11.28	11.32	11.36	11.40	11.44	11.48
Maximum Power Voltage-Vmp(V)	39.88	40.09	40.30	40.51	40.62	40.83
Maximum Power Current-Imp(A)	10.73	10.79	10.82	10.87	10.93	10.97

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum Power(pmax)	593W	599W	604W	609W	614W	620W
	Module Efficiency STC(%)	23.0%	23.2%	23.4%	23.6%	23.8%	24.0%
10%	Maximum Power(pmax)	650W	656W	661W	667W	673W	679W
	Module Efficiency STC(%)	25.1%	25.4%	25.6%	25.8%	26.0%	26.3%
15%	Maximum Power(pmax)	706W	713W	719W	725W	731W	738W
	Module Efficiency STC(%)	27.3%	27.6%	27.8%	28.1%	28.3%	28.5%

MECHANICAL DATA

Solar Cells	Mono-crystalline 182*91mm, 16 Bus bars
Cell Configuration	144cells(6*24)
Module Dimensions	2279*1134*35mm/30mm
Weight	32/31.5kg
Front Cover	2.0+2.0mm Tempered Glass
J-Box	IP68
Cable	4mm ² (IEC)/12AWG(UL), 350mm+450mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	31/36pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.25%/C
Temperature Coefficient of Isc	0.045%/C
Temperature Coefficient of Pmax	-0.30%/C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	30A
Limiting Reverse Current	30A

PACKAGING CONFIGURATION

	40HQ
Number of modules per container	620/720pcs
Package	31/36pcs/pallet
Package Nuber	20pallets
Package Weight	1032/1174kg/pallet
Package Dimension	2310*1130*1270mm/pallet