


WWW.RESUNSOLAR.COM

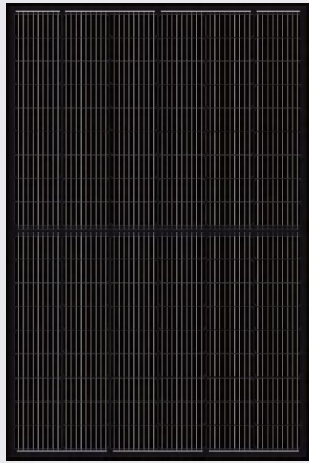


108 Cells
Mono Topcon Multi-busbar

420-435W
Power output

22.28%
The Highest Efficiency

0~+5W
Tolerance

**0.5% Annual Degradation
over 30 years**

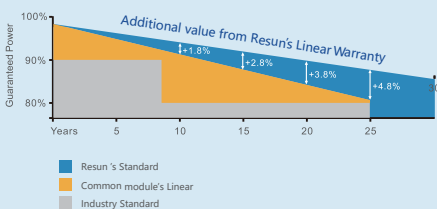

LINEAR PERFORMANCE WARRANTY
15 year Product Warranty / 30 year Linear Power Warranty

RS8V-M-FB

RS8VXXXM FULL BLACK HALF-CELL series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spotcrisis caused by shadow effect. The full black design makes the module appearance outstanding and ideal for building installations.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti PIO performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass,the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716





RS8V-M-FB




GLOBAL PROFESSIONAL PV PRODUCTS INTEGRATED SOLUTIONS SUPPLIER


Dimension of PV Modules Unit: mm

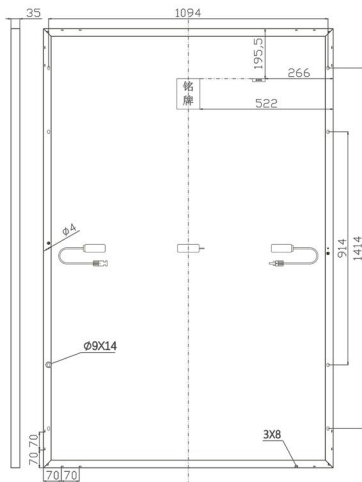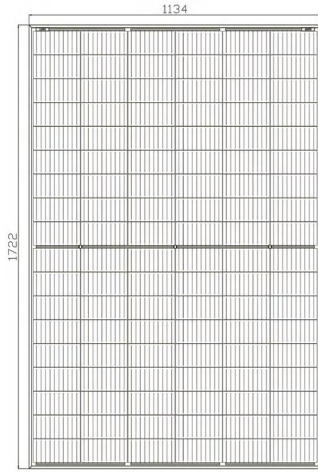

I-V CURVES OF PV MODULE(420W)



P-V CURVES OF PV MODULE(420W)



ELECTRICAL DATA(STC)

Photovoltaic module model	RS8V420M-FB	RS8V425M-FB	RS8V430M-FB	RS8V435M-FB
Rated Power in Watts-Pmax(Wp)	420	425	430	435
Open Circuit Voltage-Voc(V)	37.58	37.71	37.84	37.97
Short Circuit Current-Isc(A)	14.11	14.19	14.27	14.35
Maximum Power Voltage-Vmp(V)	31.78	31.94	32.09	32.25
Maximum Power Current-Imp(A)	13.22	13.31	13.40	13.49
Module Efficiency	21.51%	21.76%	22.02%	22.28%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	318	322	326	330
Open Circuit Voltage-Voc (V)	35.51	35.65	35.79	35.93
Short Circuit Current-Isc(A)	11.28	11.34	11.43	11.49
Maximum Power Voltage-Vmp(V)	30.06	30.23	30.49	30.66
Maximum Power Current-Imp(A)	10.56	10.62	10.69	10.76

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline 182*91mm, 9/16 Bus bars
Cell configuration	108cells(6*18)
Module dimensions	1722*1134*30mm/35mm
Weight	21.5/22kg
Front Cover	3.2mm Tempered Glass
J-BOX	IP68, 3 Diodes
Cable	4mm ² (IEC)/12AWG(UL), 1000mm(or customized)
Connectors	MC4 or MC4 Comparable
Standard Packaging	36/31 pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.35%/°C
Operational Temperature	-40~+70°C
Maximum System Voltage	1500V(IEC)/1500V(UL)
Max Series Fuse Rating	25A
Limiting Reverse Current	25A

PACKAGING CONFIGURATION

Number of modules per container	936/806 pcs/40HQ
Package	36/31 pcs/pallet
Package Number	26 pallets

Add: No: 30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China
 Email: info@resunsolar.com
 Web: www.resunsolar.com

MADE IN CHINA